


CUTTER CABLE, FLEXIBLE, UMBILICAL, WIRE ROPE

HCV270—RCV190



- ◆ Heavy duty wire rope, cable, umbilical and flexible cutter designed for use in severe working conditions
- ◆ Hydraulically operated anvil for easy ROV deployment
- ◆ Robust plated steel and stainless steel construction
- ◆ All steel components are electroless nickel plated to resist corrosion
- ◆ Long blade life ensures that tool maintenance is kept to a minimum
- ◆ Can be used at any water depth

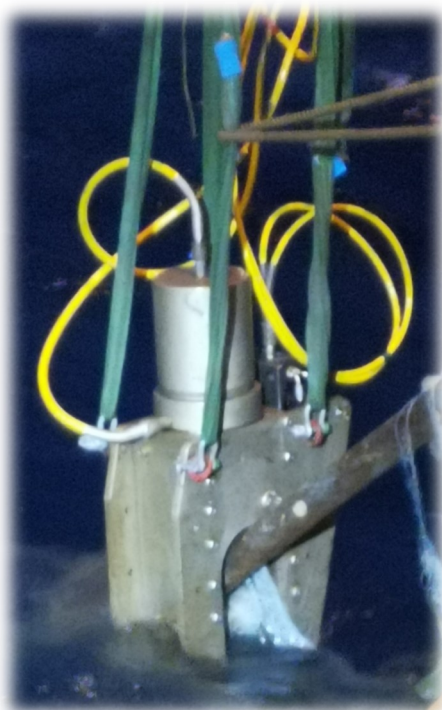

Specifications HCV270

Cutting capacity	Flexible Ø 270mm, Cable, umbilical Ø
Weight in air	352kg
Weight in water	310kg
Maximum input pressure for main cylinder	690 bar
Maximum input pressure for anvil cylinder	190 bar
Swept volume cutting	5.3L
Swept volume retract	1.9L

Specifications RCV190

Cutting capacity	Wire rope, Ø 190mm, 1880 N/m ²
	Cable, flexible, umbilical
Weight in air	292kg
Weight in water	253kg
Maximum input pressure for main cylinder	690 bar
Maximum input pressure for anvil cylinder	190 bar
Swept volume cutting	5.2L
Swept volume retract	1.4L